


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

Current Rating:
5 Amps
Voltage Rating:
250V AC R.M.S.
Insulator resistance:
1000 Megohms Min.
Dielectric withstanding:
DC 1000V for 1 minute
Contact resistance:
30miliohms Megohms Max.
Operating Temperature:
-55 ~ +105 °C
Contact Material:
Brass
Insulator Material:
PBT + 30% Glass Fiber(UL94V-0)
Contact:
plated with 30u" thick Gold in localized area and 100u" Min.thick Tin-lead in solder area over 50u"Min.thick Nickel underplate.

RoHS Compliance

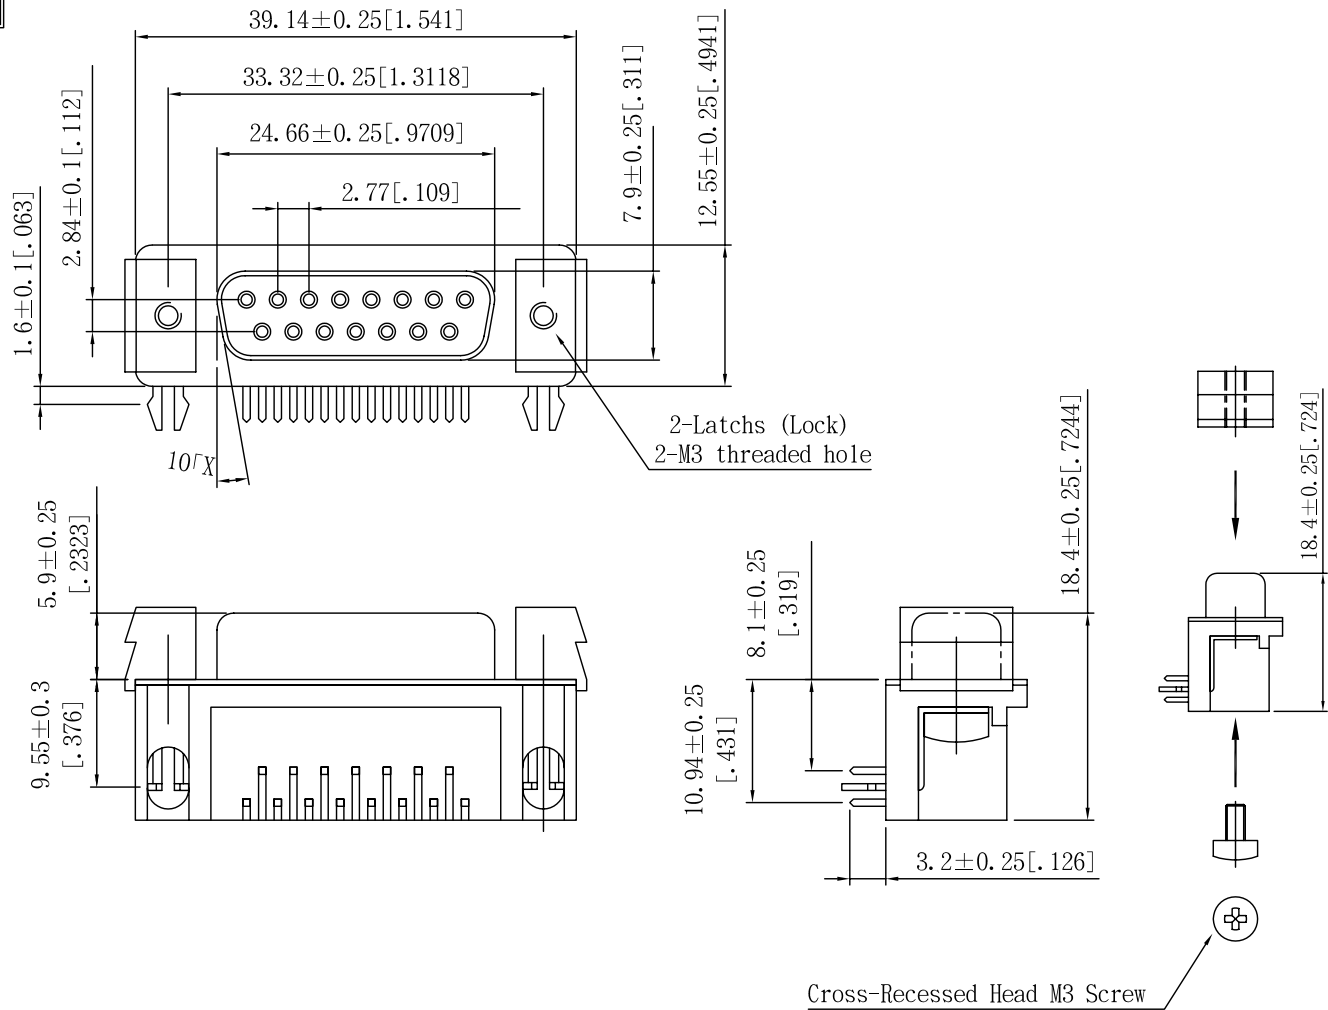

DS004-L

No. OF PINS:
09,15,25,37

Contact type:
1:Male,2:Female

Contact:
1:Gold flash and Tinned Tail
2:15u" Gold on contact
3:30u" Gold on contact
4:Selective Gold (full Gold)

Position of clinch nut:
0:3.05mm clear hole
1:Riveted front shell
2:Riveted rear shell
3:Riveted boardlock

Flange Mounting Option:
0: 3.05mm clear hole
1: #4-40 threaded hole
2: #4-40 threaded hole with #4-40 unc screwlock installed
3: #4-40 threaded hole with #4-40 unc screwlock bulk-packed
4: M3 threaded hole
5: M3 threaded hole with M3 screwlock installed
6: M2.6 threaded hole
7: M2.6 threaded hole with M2.6 screwlock installed

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC


.X = ± 0.38
.XX = ± 0.25

DRAW: CHUBBY
DATE: 05/27/05

CHECK: KEVIN
APPROVE: TONY

TITLE: D-Sub 15P Female Right Angle Type (With Latch)

MODEL CODE: DS004-L152XXX



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY