


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

NOTES:

- ENVIRONMENTAL:
TEMPERATURE RANGE -20° TO +80°
- ELECTRICAL:
RATED:
1.5A @ 40V AC (ms)
CONTACT RESISTANCE:
20 MILLIOHMS MAXIMUM
INSULATION RESISTANCE:
1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC (ms)
- MECHANICAL:
MATING FORCE:
10 LB.(4.5kg) MAXIMUM
UNMATING FORCE:
2.2 LB (1kg)MINIMUM 8.8 LB (4kg) MAXIMUM
- MATERIAL:
HOUSING:
GLASS FILLED THERMOPLASTIC NATURAL UL 94V-0
CONTACT:
PHOSPHOR BRONZE
SHELL:
ZINC OR SPCC NICKEL OVER Cu PLATED
BOARD LOCK:
BRASS TIN PLATED
- ALL DIMENSION MEASURE BY FAI MARK
MUST BE CONTROL BY QC

RoHS COMPLIANT

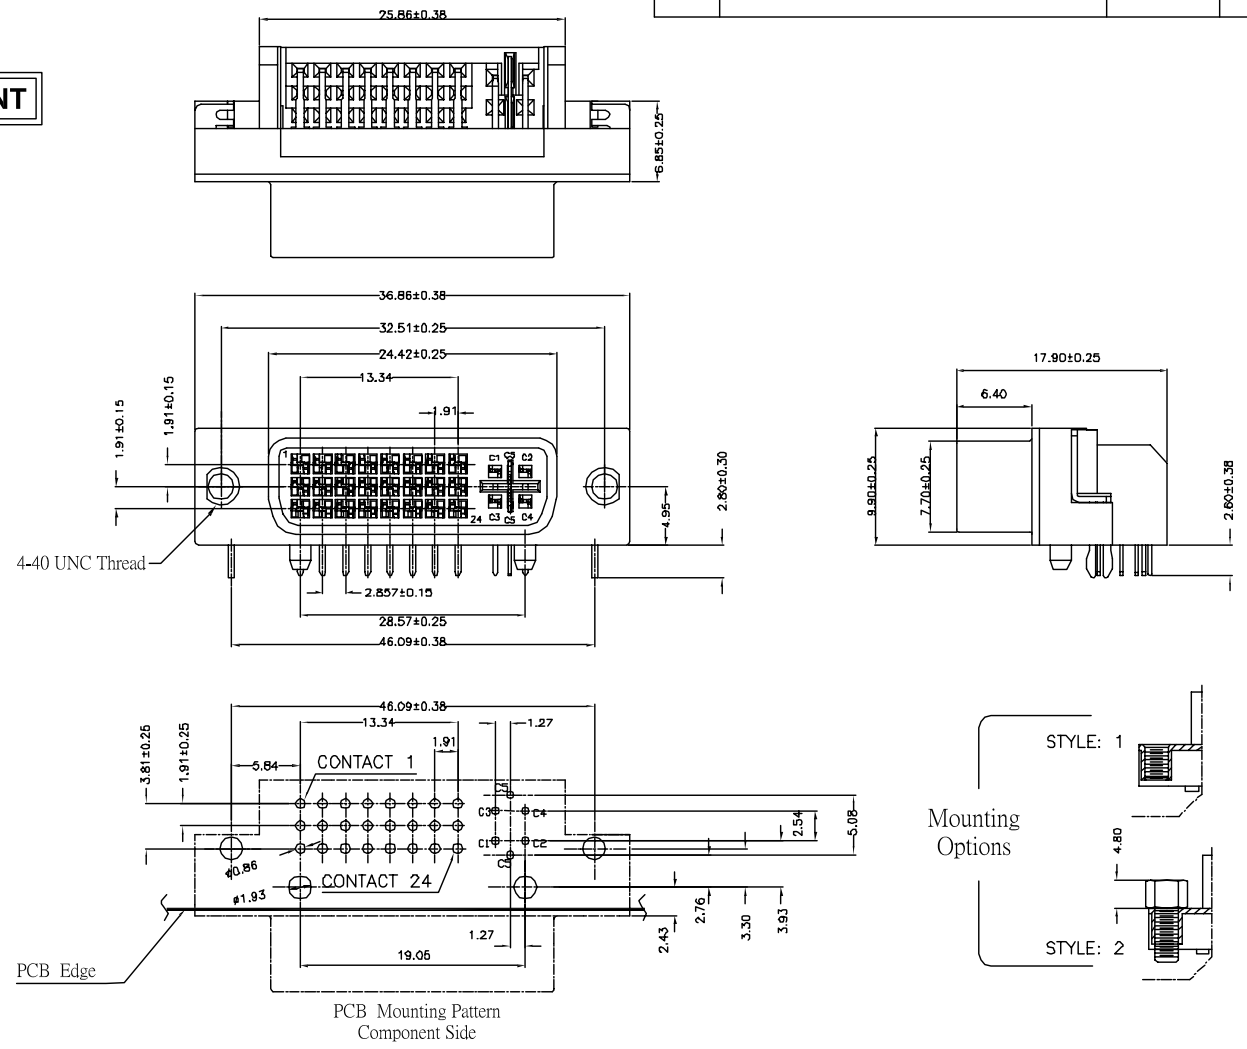

DVI CONNECTOR INTEGRATED 24+5 SOCKET
RIGHT ANGLE TYPE

DV-

Contact type: 1:Male, 2:Female	No. OF PINS: 24:24 25:24+1 29:24+5	Contact: 1:Gold flash and Tinned Tail 2:15u" Gold on contact 3:30u" Gold on contact 4:Selective Gold (full Gold)
Board Mount Type 1: Straight Solder Type 2: 90° Type	Option Of Clinch Nut 0: 3.05mm Clear Hole 1: Riveted Nut 2: Riveted Boardlock	Flange Mounting Option: 0: 3.05mm Clear Hole 1: #4-40 Threaded Hole 2: #4-40 Threaded Hole With #4-40 UNC Screwlock Installed 3: #4-40 Threaded Hole With #4-40 UNC bulk-packed

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC X. = ±0.38 .X = ±0.25 .XX = ±0.13	DRAW: Chubby	DATE: 06/23/06	TITLE: DVI Integrated 24+5 Socket Right Angle Type
	CHECK: Kevin	APPROVE: <i>Tony</i>	MODEL CODE: DV-XXXXXXXX
			<p>誠州電子有限公司 Sincere State Electronics Co.,Ltd.</p>

NO	DESCRIPTION	QTY