

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

### SPFCIFICATIONS



**RoHS Compliant**

#### 1.Electrical Char.

Insulator Resistance:500M-Ohm Min.  
 Contact Resistance:20milli-Ohm Max.  
 Current Rating:1.5A Max.  
 Voltage Rating:120V AC.  
 Dielectric Voltage:  
 1000 Vrms for 1 minute Min.



#### 2.Physical Char.

Housing: PBT Glass Filled(UL94V-0)  
 Color: Black Color  
 Spring Wire:0.35mm Thickness Phosphor Bronze  
 Gold Plated Over Nickel  
 Operating Temperature: -40°C~+85°C  
 Durability:500 Mating cycles Min.

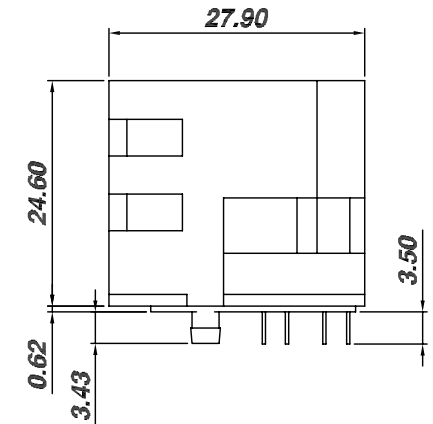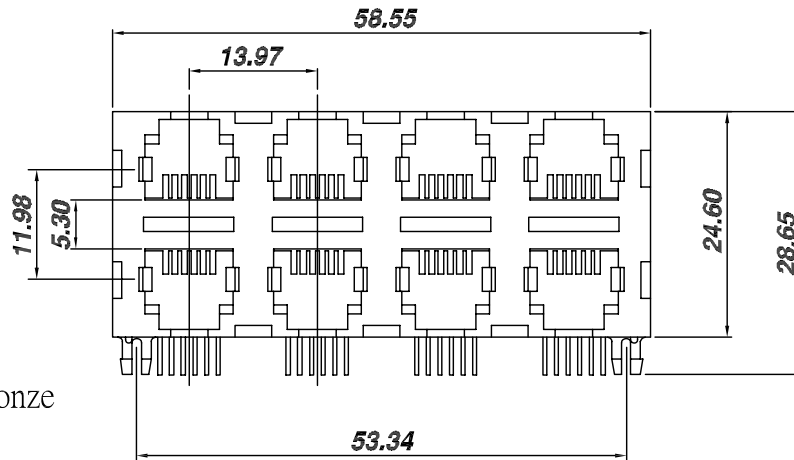

XX XX - X XX XX XX - XX X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- ① MJ: Modular Jack      ⑦ M: SMT/SMD  
 LMJ: MJ With LED      D: DIP
- ② Plastic Material      ⑧ 0: Side Entry up contact  
 P: PBT                      1: Side Entry bottom contact  
 N: Nylon                    2: Side Entry up bottom contact  
                                     3: Top Entry
- ③ Plastic Color          ⑨ LED Color  
 W: White                    Left Right  
 B: Black  
 G: Gray
- ④ 0: 4P2C    5: 8P2C      ⑩ Contact Plating  
 1: 4P4C    6: 8P4C      01 Normal  
 2: 6P2C    7: 8P6C      10 10u"  
 3: 6P4C    8: 8P8C      :  
 4: 6P6C                    :
- ⑤ 0: All Plastic            ⑪ G: Gold Plated  
 1: With Metal Shield    T: Tin Plated  
 2: With Metal Shield    D: Duplex Plated  
 and Spring
- ⑥ No. of Port  
 H x V

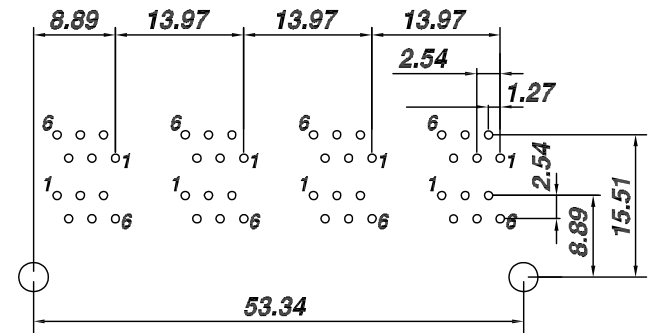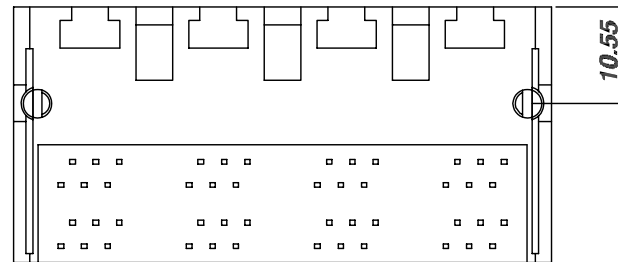

PCB LAYOUT

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm  METRIC  .XX = ±0.25 .XXX = ±0.13	DRAW: <b>Chubby</b>	DATE: 05/25/06	TITLE: Double Deck Gang PCB Jack
	CHECK: KEVIN	APPROVE: TONY	MODEL CODE: MJPB-6042D2-XXX
	<b>誠州電子有限公司</b> <i>Sincere State Electronics Co.,Ltd.</i>		

NO	DESCRIPTION	QTY