
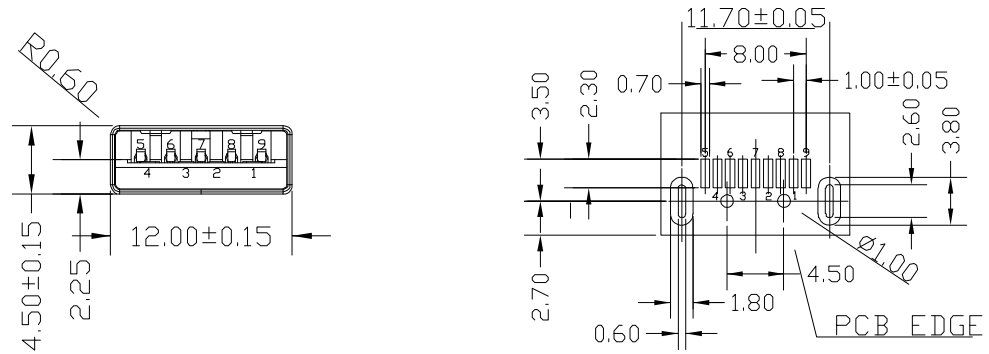


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:


DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPECIFICATIONS

Contact Current:
 1.5A
Insulator Resistance:
 1000 Megohms min.
Contact Resistance:
 30 m ohms max.
Dielectric withstanding:
 500V/minute
Contact Material:
 Brass, gold/tin plated
Insulator Material:
 PA9T UL94V-0
Color: BLUE
Shell:
 SPCC T=0.30mm nickel plated
Back Cover:
 SPCC T=0.3mm nickel plated
Clip: steel T=0.25mm Nickel plated
Mating force: 3.57Kg MAX
Unmating force: 1.02Kg MIN

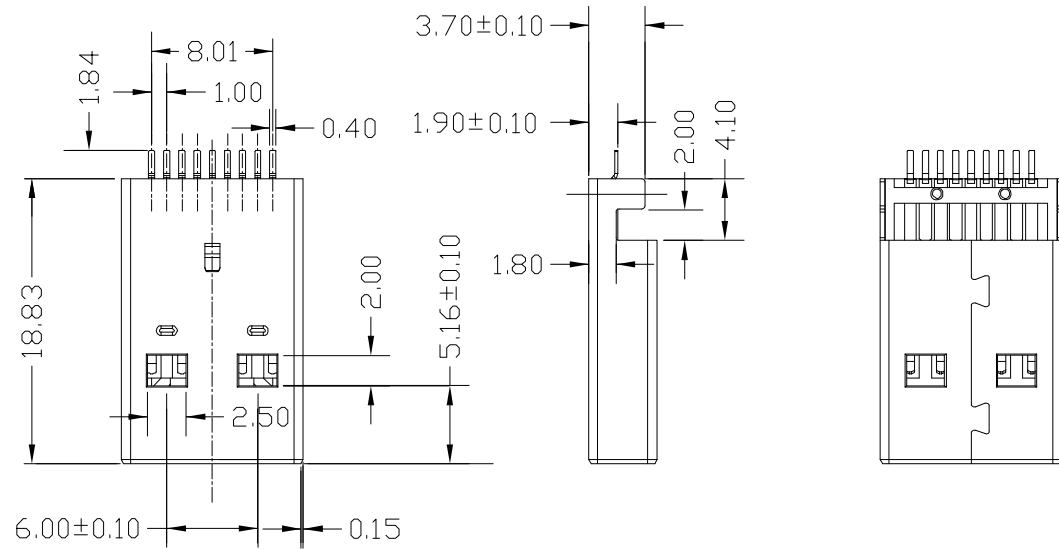

PCB LAYOUT

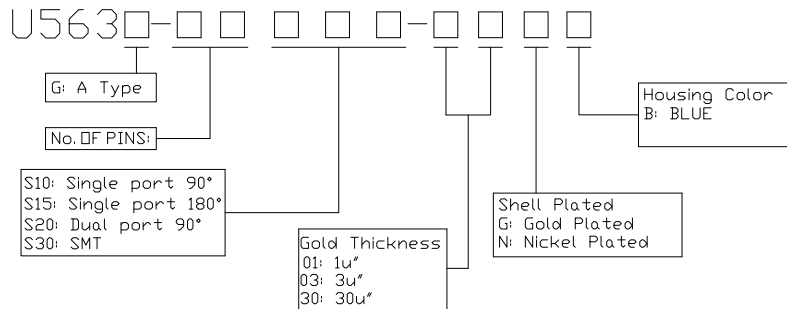

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC .X = ±0.30 .XX = ±0.20	DRAW: <i>Chubby</i>	DATE: 08/10/10	TITLE: USB 3.0 A Male SMT Type
	CHECK: KEVIN	APPROVE: <i>TONY</i>	MODEL CODE: U563A-09S30-XXXX
			誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>